

Features

12 Cup Automatic Coffee Brewer

- Twin brew head systems.
- Brews 13.7 gallons of perfect coffee per hour.
- Six individually controlled warming stations.
- All stainless steel construction.
- Includes hot water faucet.
- Pourover feature on both sides.
- SplashGard® funnel deflects hot liquids away from the hand.
- Low profile design.



*Model CWTF 0/6 Twin
(decanters not included)*

Dimensions: 20.6" H x 30.3" W x 19.8" D

DBC Features

Automatic CDBC Coffee Brewers

- Larger 200 oz. tank provides back-to-back brewing capacity.
- Improved brewing system has better temperature accuracy.
- Adjusts automatically to varying water pressure.
- Quicker install saves up to 30 minutes. Pot level, cold brew lock-out and tank temperature set easily from advanced touch pad on front of machine.
- Faster field repairs and quick problem diagnostics by phone; built-in electronic sensors feed back information on brewer malfunctions.
- Insures coffee brew quality with cold brew lock out capability.
- SplashGard® funnel deflects hot liquids away from the hand.
- Coffee extraction controlled with pre-infusion, Pulse Brew™ and digital temperature control.



*Model CDBC 0/6 Twin
(decanters not included)*

Dimensions: 20.5" H x 30.3" W x 19.7" D

ITEM#

PROJECT

DATE

Model

*CWTF 0/6 Twin
CDBC 0/6 Twin*

BUNN®

Corporate Offices

1400 Stevenson Drive
Springfield, Illinois 62703

Phone

800-637-8606
217-529-6601

Fax

217-529-6644

Technical Services

800-286-6070

Internet

<http://www.bunnomatic.com>

Western Regional Office

16431 Carmenita Road,
Cerritos, California 90701

Phone

562-926-0764

Fax

562-926-0858

Canadian Office

280 Industrial Parkway South
Aurora, Ontario, L4G 3T9

Phone

905-841-2866

Fax

905-841-2775

Patents
Apply



BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.


Dimensions & Specifications

Model	Product #	Volts	Amps	Tank Heater Watts	Total Watts	Brewing Capacity	Cu. Ft.	Shipping Weight	Cord Attached
CWTF 0/6 Twin	23400.0020	120/240	28.75	2 @ 3000	6850	13.7 gal./hr.	11.7	74 lbs. (33.6 kg)	No
CWTF 0/6 Twin*	23400.0022	120/240	17.90	2 @ 3500	3900 x 2	13.7 gal./hr.	11.7	74 lbs. (33.6 kg)	No
CDBCF 0/6 Twin	29100.0100	120/240	28.75	2 @ 3000	6850	17.0 gal./hr.	11.7	74 lbs. (33.6 kg)	No
CDBCF 0/6 Twin*	29100.0102	120/240	17.90	2 @ 3500	3900 x 2	17.0 gal./hr.	11.7	74 lbs. (33.6 kg)	No


*Stainless steel legs included. Two power cords are required but not supplied. Amp rating is for each cord.
Machine has two 3500 watt tank heaters.

Electrical: 3-wires plus ground, single phase, 60 Hz.

Plumbing: 20-90 psi (138-621 kPa). Machine supplied with $\frac{3}{8}$ " male flare fitting.

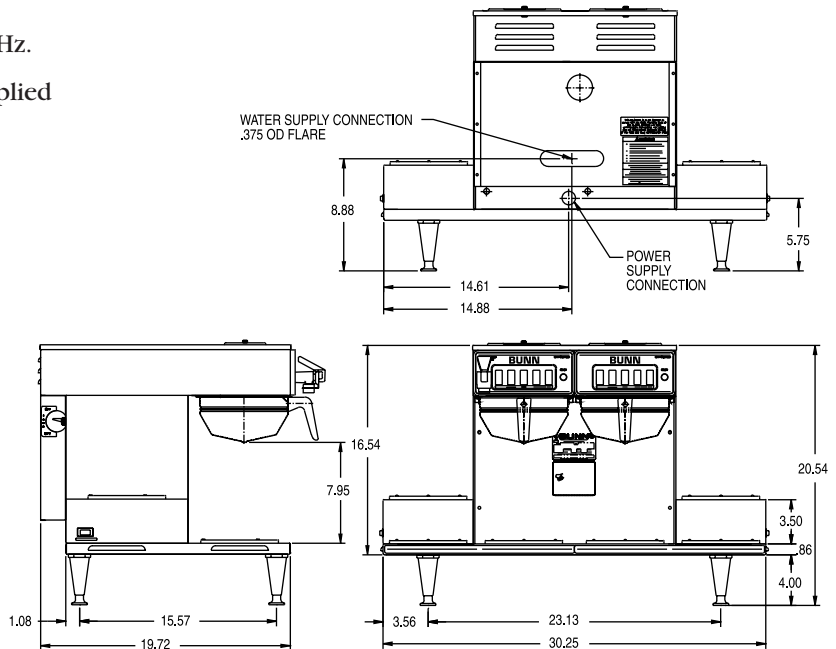

CWTF 0/6 Twin



CDBCF 0/6 Twin

