

3 Gallon Automatic Electric Coffee Urn

ITEM# _____

PROJECT _____

DATE _____



Features

Automatic Electric Coffee Urn

- Brews 11.4 gallons (43.2 litres) of perfect coffee per hour.
- Three gallon (11.4 litres) coffee urn measuring only 14" wide fits most counters.
- Automatic drip brewing of delicious coffee every time.
- Large water tank—over 10 gallons.
- Draw off hot water during brewing cycle without affecting delivery of coffee.
- All stainless steel construction.
- Can brew full or half batches.
- Top mounted components for ease of service.
- International electrical configurations available.

Model SRU *

Dimensions: 33.5" H x 14" W x 24.6" D
(85.1 cm H x 35.6 cm W x 62.5 cm D)

For current specification sheets and other information, go to www.bunn.com.

* International models may vary in appearance.

Related Products

Easy Clear® EQ-12-TL

Product No. : 30345.1001
Dimensions:
20 1/8" H x 3 5/8" W x 4 17/32" D
51.12 cm H x 9.21 cm W x 11.51 cm D



SRU Paper Filters

Product No. : 20109.0000
Packed per case: 250
Dimensions:
7" Base x 5 1/4" Sidewall
17.78 cm Base x 13.34 cm Sidewall



Easy Pour® black decanter

Product No. : 06100.0101
Quantity: 1
(also packaged in quantities of 2, 3, 6, 12, & 24)



Easy Pour® orange decanter (for decaf)

Product No. : 06101.0101
Quantity: 1
(also packaged in quantities of 2, 3, 6, 12, & 24)



Easy Clear® ED-12-TL

Product No. : 30201.0001
Dimensions:
23 3/4" H x 5 3/16" W x 5 3/16" D
60.33 cm H x 13.18 cm W x 13.18 cm D



SRU Drip Tray (Optional)

Product No. : 06465.0000
All Stainless Steel



4" Leg Conversion Kit

Product No.: 06333.0000



Model

SRU

Agency Listing



Dimensions & Specifications


Model	Product #	Volts	Amps	Tank Heater Watts	Total Watts	Brewing Capacity	Cu. Ft.	Shipping Weight	Cord Attached
SRU	06325.0001	120/208	19.4	3950	4025	11.4 gal./hr.	3.1	73 lbs.	No
SRU	06325.0002	120/240	17.0	3950	4025	11.4 gal./hr.	3.1	75 lbs.	No

Brewing capacity: based upon incoming water temp of 60°F (140°F rise).

Models listed as 120/208V or 120/240V must be connected to 208V or 240V electrical service respectively. Please refer to the installation manual.

Electrical: Models require 3-wires plus ground service, single phase, 60 Hz.

Plumbing: 20-90 psi (138-621 kPa). Supplied with 3/8" OD male flare fitting.

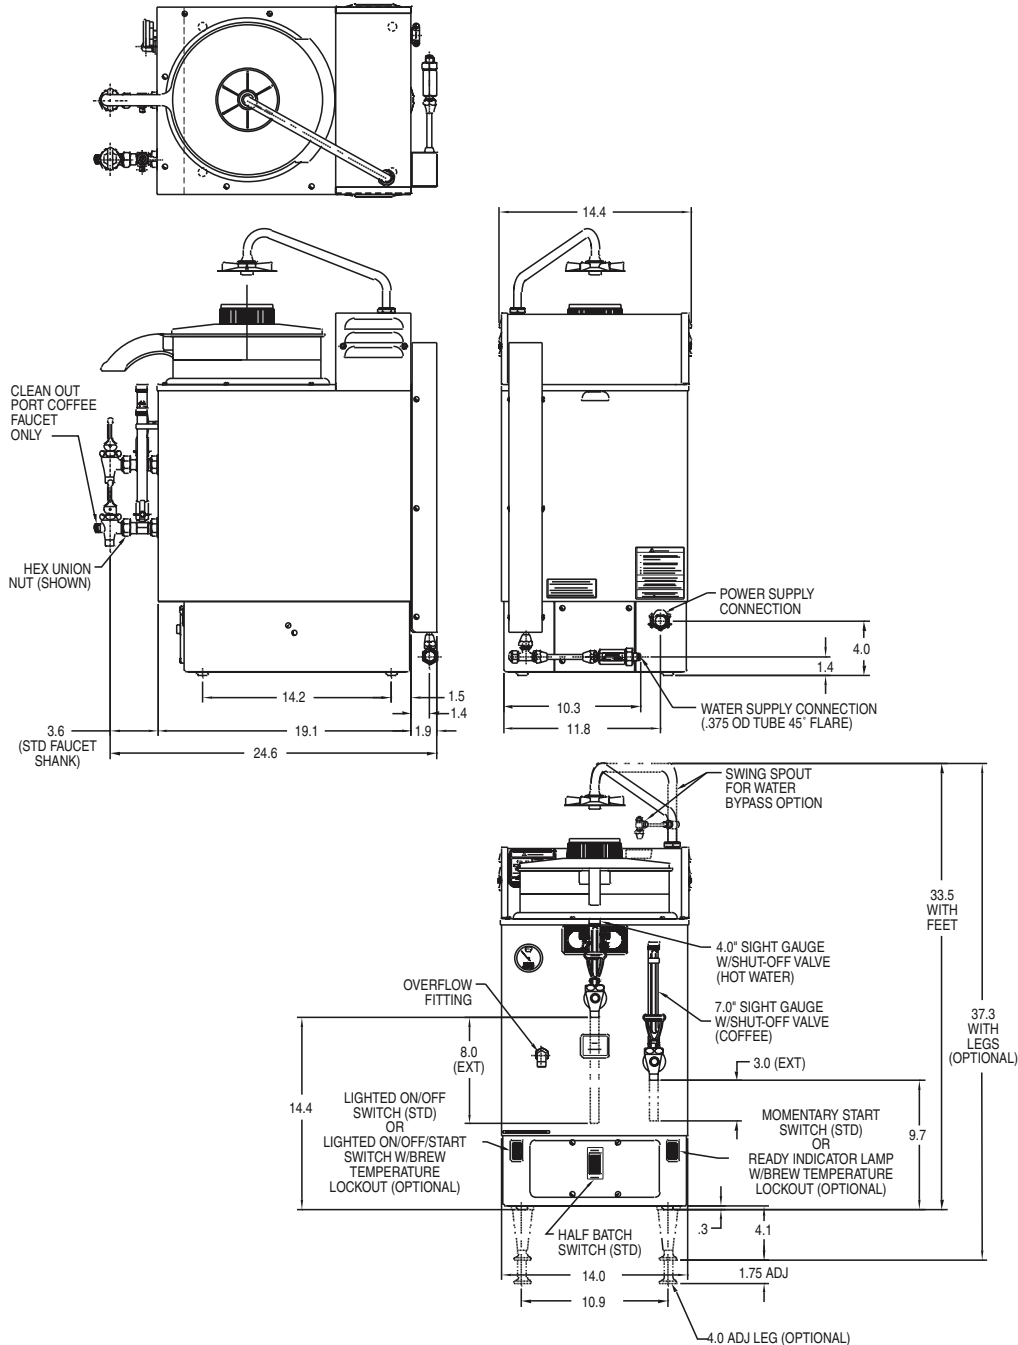

BUNN Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • 800-637-8606 • 217-529-6601 • Fax 217-529-6644 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in inches. Bunn Corporation owns all copyrights relating to materials in this publication. Please contact Bunn Corporation to request permission to reproduce any portion of this publication.